

CHAMPION

PL-SERIES | 20-30 HP RECIPROCATING COMPRESSORS

Pump Model PL-70A

The Solution to Your Application


Champion PL-Series pressure lubricated compressors offer rugged standard features, a wide selection of configurations, quality available options, and a time-tested design. High performance, long life and tremendous value make Champion compressors the proven solution to your application.

Standard Features

- Magnetic Starter
- Loadless starting (via hydraulic unloader)
- Dual control
- ASME pressure relief valve
- ODP NEMA 1760 RPM motor
- 10 Micron intake air filter
- ASME coded receiver
- 0-300 PSIG air pressure gauge
- Available voltages
 - 1 Phase—115/208-230
 - 3 Phase—208/230/460/575
- 1-Year package warranty
- 5-Year pro-rated pump warranty

Available Options

- Multiple tank sizes and variations
- Electric or engine driven
- NEMA 4 full-voltage starter upgrade
- Premium efficiency motor upgrades
- Control panel upgrades
- Aftercooler with or without moisture separator
- Low oil-pressure switch (NEMA 1 or 4)
- Vibration isolators
- High temperature switch (NEMA 1 or 4)
- Available switches (NEMA 1 or 4)
 - Hand/Off/Auto, Off/On
- Pneumatic or electric tank drain

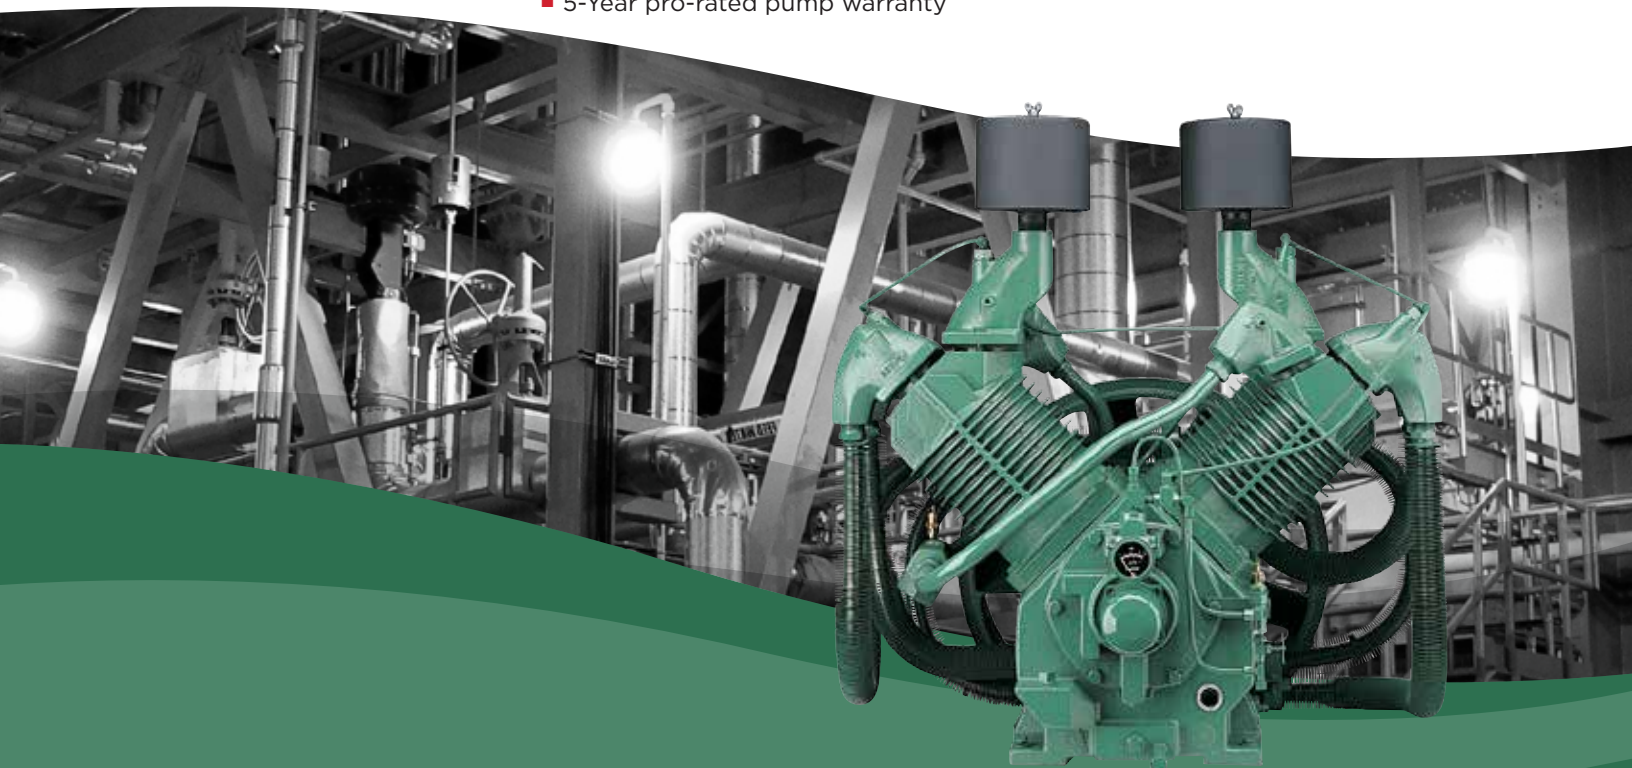

BARE PUMP

MODEL	DIMENSIONS L x W x H INCHES	APPROX. SHIP WEIGHT LBS.	DISPL./REV. CUBIC FEET	BORE DIA. INCHES	STROKE INCHES	# OF CYLINDERS	OIL CAPACITY QTS.	MIN/MAX PUMP RPM
PL-70A	28.6 x 33.5 x 33.8	570	0.1420	6.3 & 3.3	4	4	4	425/1000

BASE MOUNTED UNITS

MOTOR HP	PL-SERIES CBBPLA	DIMENSIONS L x W x H INCHES	APPROX. SHIP WEIGHT LBS.	125 PSI RATING		175 PSI RATING		250 PSI RATING	
				RPM	CFM DEL'Y	RPM	CFM DEL'Y	RPM	CFM DEL'Y
20	BPL20	57.9 x 33.9 x 39.8	1000	770	91.9	665	76.7	545	64.1
25	BPL25	57.9 x 33.9 x 39.8	1020	890	102.1	770	90.1	660	76.8
30	BPL30	57.9 x 33.9 x 39.8	1059	890	102.1	890	101.1	770	90

SIMPLEX HORIZONTAL TANK MOUNTED UNITS

MOTOR HP	TANK CAPACITY GAL.	PL-SERIES CBSPLA	DIMENSIONS L x W x H INCHES	APPROX. SHIP WEIGHT LBS.	125 PSI RATING		175 PSI RATING		250 PSI RATING	
					RPM	CFM DEL'Y	RPM	CFM DEL'Y	RPM	CFM DEL'Y
20	120	HPL20-12	72.6 x 33.9 x 63.6	1325	770	91.9	655	76.7	545	64.1
20	250	HPL20-25	89.2 x 33.9 x 70.6	1790	770	91.9	655	76.7	545	64.1
25	120	HPL25-12	72.6 x 33.9 x 63.6	1365	890	102.1	770	90.1	660	76.8
25	250	HPL25-25	89.2 x 33.9 x 70.6	1735	890	102.1	770	90.1	660	76.8
30	120	HPL30-12	72.6 x 33.9 x 63.6	1404	890	102.1	890	101	770	90
30	250	HPL30-25	89.2 x 33.9 x 70.6	1774	890	102.1	890	101	770	90

DUPLEX TANK MOUNTED UNITS

MOTOR HP	TANK CAPACITY GAL.	PL-SERIES CBDPLA	DIMENSIONS L x W x H INCHES	APPROX. SHIP WEIGHT LBS.	125 PSI RATING		175 PSI RATING		250 PSI RATING	
					RPM	CFM DEL'Y	RPM	CFM DEL'Y	RPM	CFM DEL'Y
20 (2)	250	HPL20D-25	89.2 x 64.5 x 75.3	2845	770	183.8	655	153.4	545	128.2
25 (2)	250	HPL25D-25	89.2 x 64.5 x 75.3	2940	890	204.2	770	180.2	660	153.6
30 (2)	250	HPL30D-25	89.2 x 64.5 x 75.3	3018	890	204.2	890	202	770	180

Simplex CFM values are doubled for duplex units. Duplex units have two motors and two pumps on one tank.

CHAMPION

1301 North Euclid Avenue
Princeton, Illinois 61356 USA
www.ChampionPneumatic.com/ContactUs.aspx
866-276-4330
www.ChampionPneumatic.com



©2015 Gardner Denver, Inc. Printed in U.S.A.
CR-PL-PL70 1st Ed. 11/15

Product specifications and materials are subject to change without notice.

